

APPROVED	O.G. FIG.	
BY	CLASS.	SUBCLASS
DRAFTSMAN		

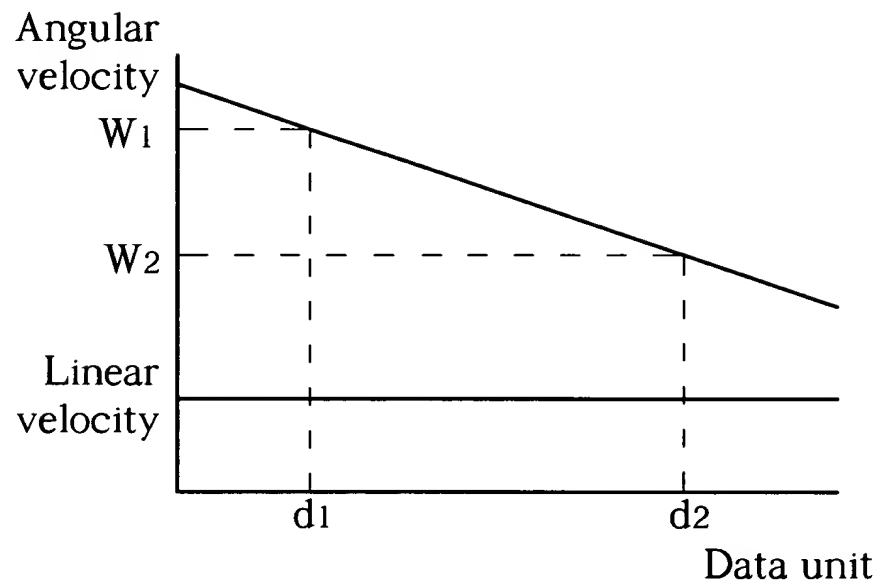


Fig. 1 Prior art

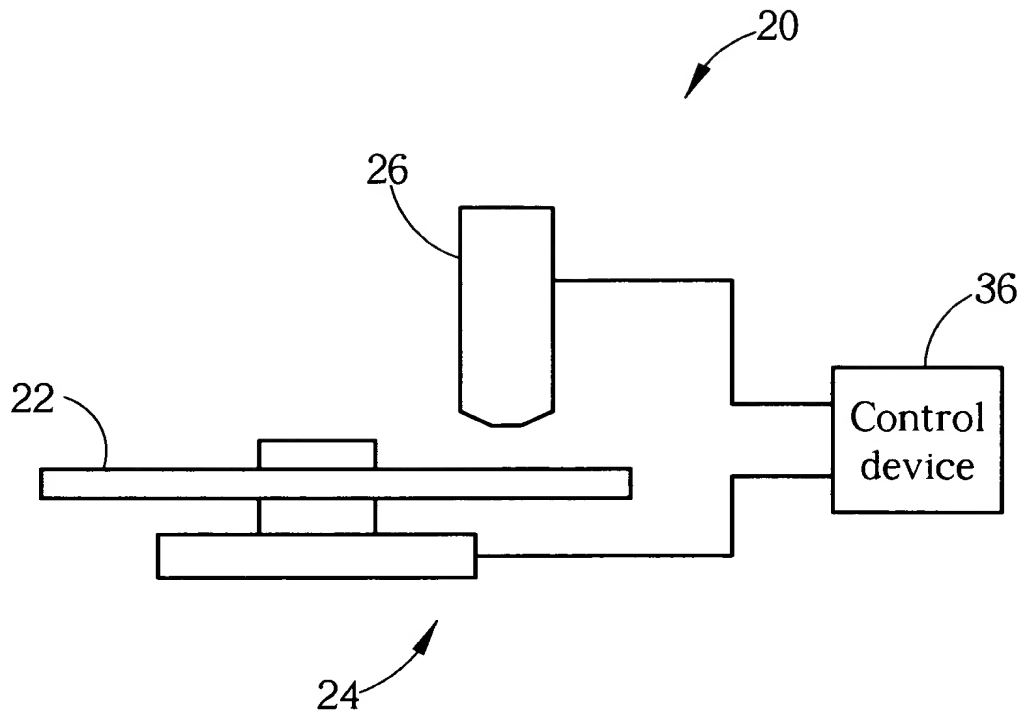


Fig. 2

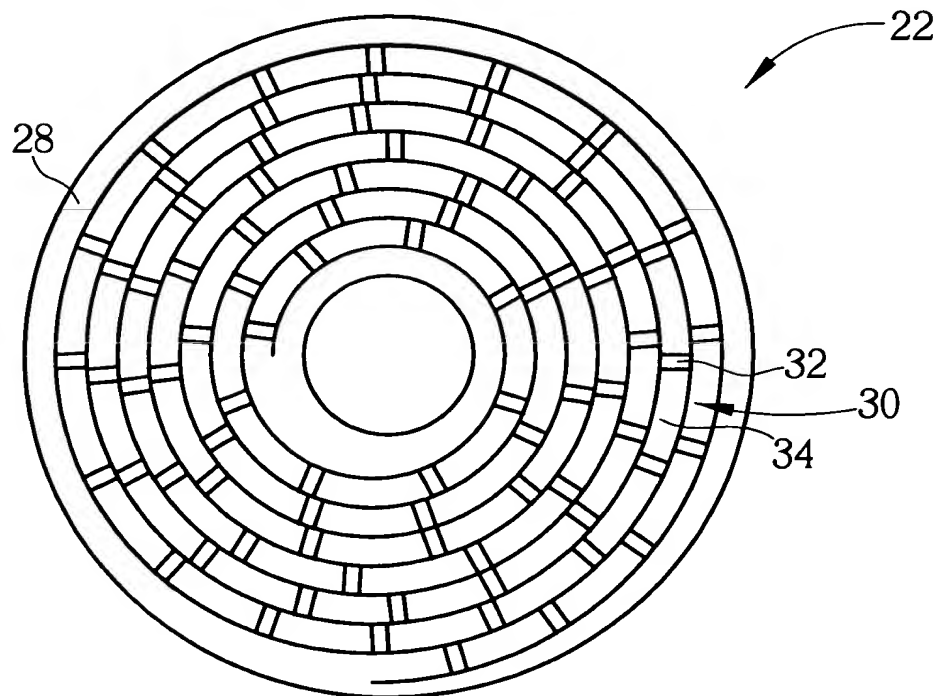


Fig. 3

38

Data block	Logic block address data	Linear velocity	Recording speed	Optical recording intensity
$Z_1$	$T_0 - T_1$	$V_1$	$R_1$	$A_1$
$Z_2$	$T_1 - T_2$	$V_2$	$R_2$	$A_2$
$Z_3$	$T_2 - T_3$	$V_3$	$R_3$	$A_3$
$Z_4$	$T_3 - T_4$	$V_4$	$R_4$	$A_4$

Fig. 4

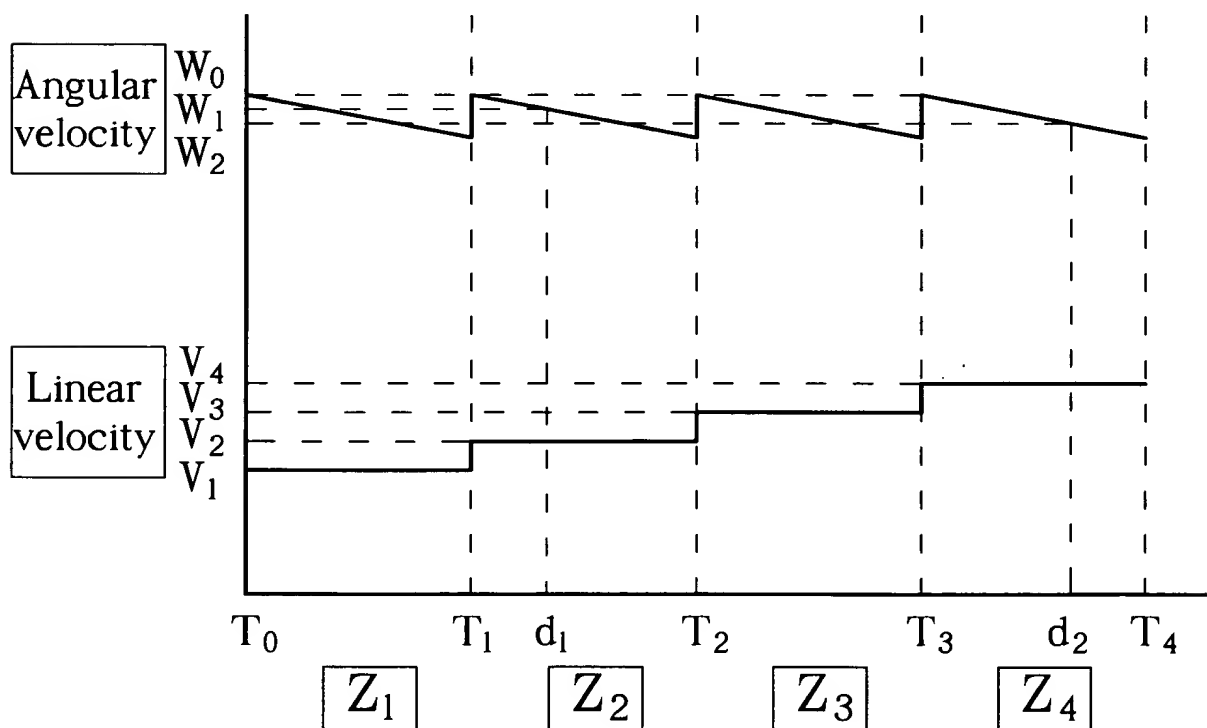


Fig. 5

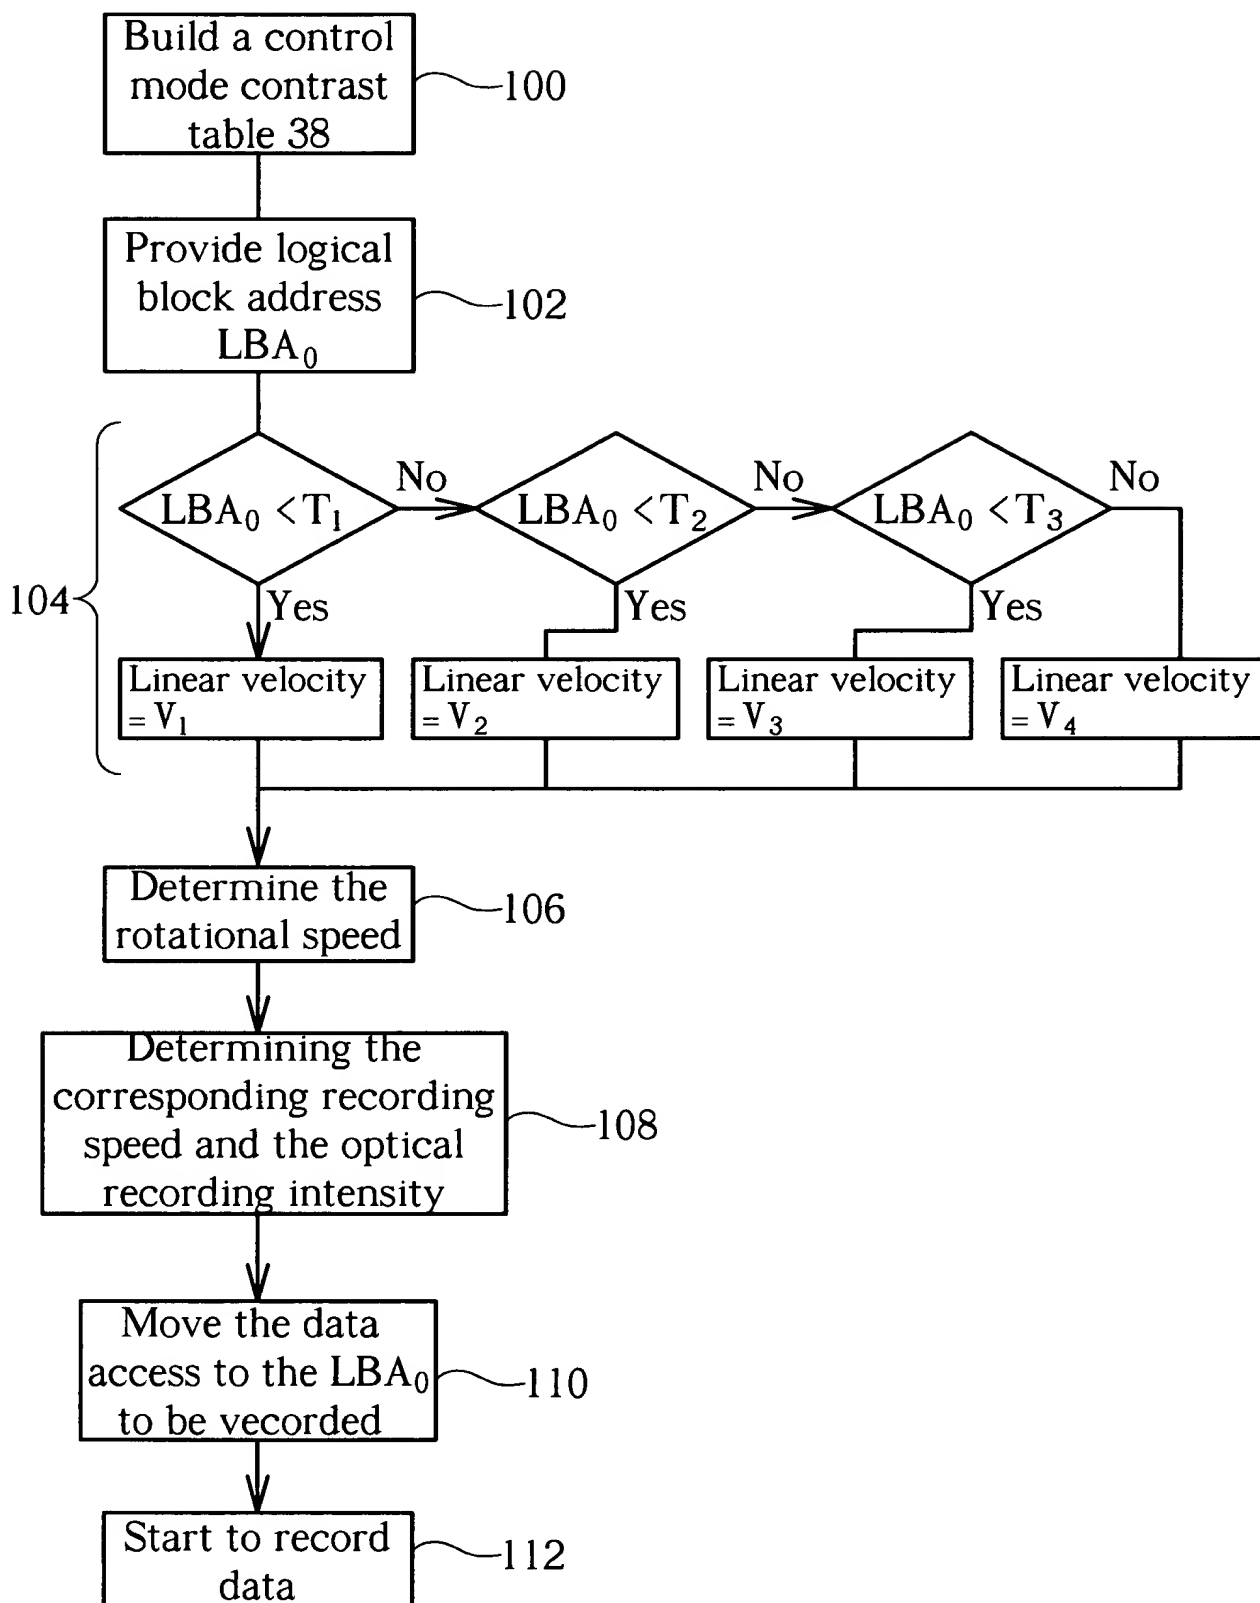


Fig. 6

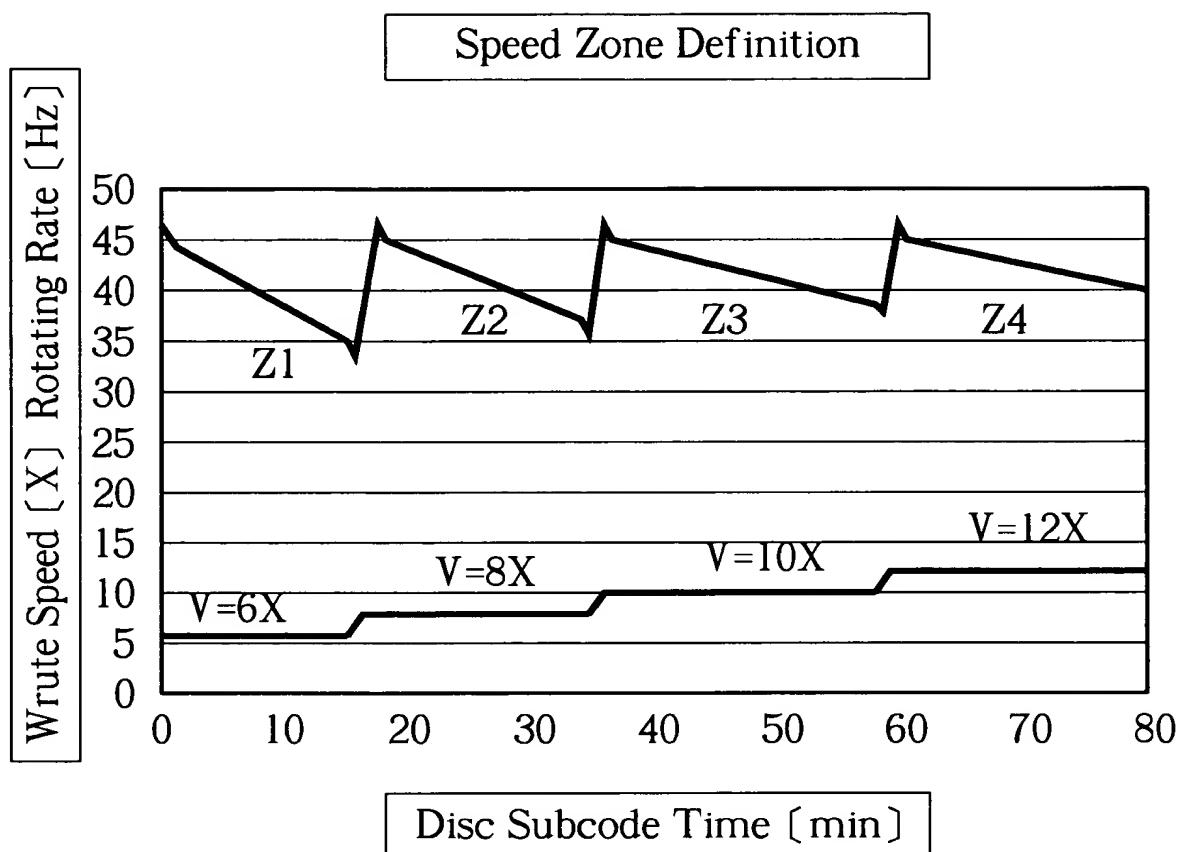


Fig. 7

	Constant linear velocity control ( 8X )	Four-stage linear velocity control ( 8-10X )
Temperature of the spindle motor	60℃	41℃
Power consuming of the driver	4.3W	1.8W

Fig. 8